


With the "M series" electrode design thermal, shock is a thing of the past. What's more, its design enables users to execute probe changeover much more efficiently than the traditional "inch a minute" interval. The rugged electrode design is ideal for heavy carburizing applications and is specifically designed for effective burn off without worry of thermal shock.

Fast Probe Changeover in 5 minutes or less

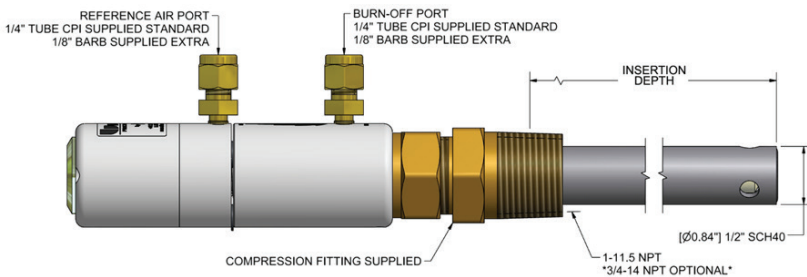

NOTES:

- Optional female connector supplied (1st time installs)
- Tolerances are: decimals: .XX ±.01"; .XXX ±.005"; .XXXX ±.0005"

Part #	T/C	INSERTION DEPTH	
		mm	in
FC60600X	-	600 mm	23.6"
FC60600K	K	600 mm	23.6"
FC60600R	R	600 mm	23.6"
FC60600S	S	600 mm	23.6"
FC60800X	-	800 mm	31.5"
FC60800K	K	800 mm	31.5"
FC60800R	R	800 mm	31.5"
FC60800S	S	800 mm	31.5"
FC61000X	-	1000 mm	39.4"
FC61000X	K	1000 mm	39.4"
FC61000X	R	1000 mm	39.4"
FC61000X	S	1000 mm	39.4"

